

TYPE DFA DRAIN ORIFICE STEAM TRAP

**Pressures To 2500 PSIG (172 barg)
Temperatures to 750°F (400°C)**

APPLICATIONS

- Pressure Reduction
- Ratio of Flow-mixing two or more fluids at fixed ratio
- Fixed Flow-i.e. gland seal recirculation of cooling water on pumps, compressors, process analyzers, etc.
- Intermittent Drainage-i.e. air tools, air storage tanks, cleaning fixtures, air vents, etc.
- Cryogenic Storage Venting
- Low Pressure Blanking
- Sampling of process fluids at a fixed flow rate for use with Instrument Analyzers

Canadian Registration # 0E0591.9

MAINTENANCE BENEFITS

- Typical service life exceeds 10 years.
- Zero maintenance costs over the service life of the Orifice.
- No moving parts offers maintenance free operation when properly installed.
- Low spare parts inventory.
- Easy to install.

ENERGY SAVING BENEFITS

- Design factor results in reduced initial steam loss.
- Fuel savings to 50% achieved in applications during past 10 years.
- Maintains low rate of steam loss over entire service life.
- Cannot fail open, eliminating large steam losses.

OPERATING BENEFITS

- Accommodates varying condensate loads created by modulating pressures.
- Freeze proof.
- Resists thermal and hydraulic shock.
- Reduces make-up water to boiler and water chemical treatment costs.
- Maintains constant pressure to condensate return systems.
- Meets dimensional requirements of MS 18301 Specifications.

MODELS

- DFA-Drain Orifice Trap with gaskets and inlet screen.
- DFR-Replacement gasket kit including inlet screen.

OPERATION


The Nicholson Drain Orifice Trap is an engineered, continuous flow device. The controlling element in the Drain Orifice Assembly is a flat S.S. plate, 1/4" thick. Drain Orifices discharge air, condensate and all other non-condensable gases with minimal live steam loss. The fixed orifice size is calculated, for a given application, to discharge the condensate load at a maximum thermal efficiency. Approximately 10-25% of discharging hot condensate flashes to steam at the downstream side of the orifice, at a constant pressure drop. This flashing effect further restricts the flow of

saturated steam. In actual conditions, a minimum percentage of steam, by weight, is discharged with condensate, since the specific volume of steam is large compared to that of the condensate. The velocity through the orifice is highly turbulent. The initial calculated steam loss can be expected to remain relatively constant over the expected 10+ years trap life. The major factor for energy efficient performance is based on initial orifice sizing for the application. Properly sized, thermal efficiencies of 98%+ can be attained. The Drain Orifice Trap is ideally suited for use on high pressure steam (saturated or superheated) from 600 PSIG to 2500 PSIG with minimum steam loss, zero maintenance and long service life.

TYPE DFA DRAIN ORIFICE STEAM TRAP

SPECIFICATION

Orifice Drain shall comply with dimensional requirements of MILSPEC MS 18301 and consist of 1/4" 304 stainless orifice plate fixed between user supplied flanges. It shall be sealed by spiral wound gaskets. Inlet gasket shall be modified with a stainless steel mesh strainer affixed across the inside diameter. Orifice shall be sized for the application to a minimum of 0.020".

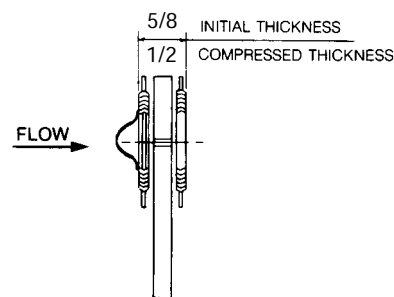

Connections: 1/2" – 2" Wafer Style
ANSI 150#, 600#, 1500# & 2500#

MAXIMUM OPERATING CONDITIONS

PMO: Max. Operating Pressure 2500 psig (172 barg)

TMO: Max. Operating Temperature 750°F (400°C)

PMA: Max. Allowable Pressure 2500 psig (172 barg)

TMA: Max. Allowable Temperature 750°F (400°C)

MATERIALS OF CONSTRUCTION

Inlet GasketSpiral-wound 347 S.S./Graphite
.....w/S.S. 60 mesh dome strainer insert
Orifice Plate304 S.S., 1/4" thick
Outlet GasketSpiral-wound 347 S.S./Graphite
Customer to supply ANSI B16.5 flanges.

SIZING*

Consult Factory–required information:

Condensate Load _____

Inlet Pressure _____

Outlet Pressure _____

Elevation of return line over trap (if any) _____

* Specify orifice size when ordering .

Dimensions

Pipe Size NPT	Min. Pipe Bore (in.)*	Min. Orifice
1/2"	9/16	.020
3/4"	3/4	.020
1"	7/8	.020
1 1/4"	N/A	.020
1 1/2"	N/A	.020
2"	N/A	.020

* Dome strainer used for sizes up to 1".
Flat strainer used for larger sizes.

TYPE DUA ORIFICE UNION ASSEMBLY



**Pressures To 3000 PSIG (207 barg)
Temperatures to 850°F (454°C)**

APPLICATIONS

- Condensate Removal
- Pressure Reduction
- Ratio of Flow-mixing two or more fluids at fixed ratio
- Fixed Flow-i.e. gland seal recirculation of cooling water on pumps, compressors, process analyzers, etc.
- Intermittent Drainage-i.e. air tools, air storage tanks, cleaning fixtures, air vents, etc.
- Cryogenic Storage Venting
- Low Pressure Blanking
- Sampling of process fluids at a fixed flow rate for use with Instrument Analyzers

OPTION

- SW - Socketweld

Canadian Registration # 0E0591.9

Reliable Operation — High reliability labyrinth-type seal: leak tight seal is maintained when subjected to expansion or contraction due to temperature or pressure changes in the line. Positive, leak-tight seal eliminates loss of product.

Ease of Installation — No danger of damaging seats or losing seal by overtorquing during installation. Requires normal torque to obtain a leak-tight seal. Welding repairs reduced; no need to replace union components welded to pipe.

Low Cost Maintenance — Downtime, labor and material costs drastically reduced. Service is required only when the union is disassembled, then only a change of gaskets is required to put it back in service. Eliminates the need to replace the union housing.

Flexibility — Orifice easily replaced where a different orifice size is required for a specific application. Orifice can be redrilled to a larger size, if necessary, eliminating need to replace the entire assembly. Infinite range of orifice sizes available from a minimum 0.020" diameter.

MODELS

- **DUA**—Orifice Union
- **RUA**—Orifice Kit includes 2 gaskets, orifice plate and inlet screen.
- **DUR**—Gasket Kit includes 2 gaskets and inlet screen.
- **SUG**—Gasket Kit includes 10 gaskets.

OPERATION

The Nicholson Drain Orifice Trap is an engineered, continuous flow device. The controlling element in the Drain Orifice Assembly is a flat S.S. plate, 1/4" thick. Drain Orifices discharge air, condensate and all other non-condensable gases with minimal live steam loss. The fixed orifice size is calculated, for a given application, to discharge the condensate load at a maximum thermal efficiency. Approximately 10-25% of discharging hot condensate flashes to steam at the downstream side of the orifice, at a constant pressure drop. This flashing effect further restricts the flow of

saturated steam. In actual conditions, a minimum percentage of steam, by weight, is discharged with condensate, since the specific volume of steam is large compared to that of the condensate. The velocity through the orifice is highly turbulent. The initial calculated steam loss can be expected to remain relatively constant over the expected 10+ years trap life. The major factor for energy efficient performance is based on initial orifice sizing for the application. Properly sized, thermal efficiencies of 98%+ can be attained. The Drain Orifice Trap is ideally suited for use on high pressure steam (saturated or superheated) from 300 PSIG to 3000 PSIG with minimum steam loss, zero maintenance and long service life.

