
www.mmcontrol.com/Trerice.php

## STAINLESS STEEL

All dimensions are nominal. Dimensions in [ ] are in millimeters.

(for 940 Series Heavy Duty Control Valve)  $3-WAY \bullet 1/2" - 2"$ 

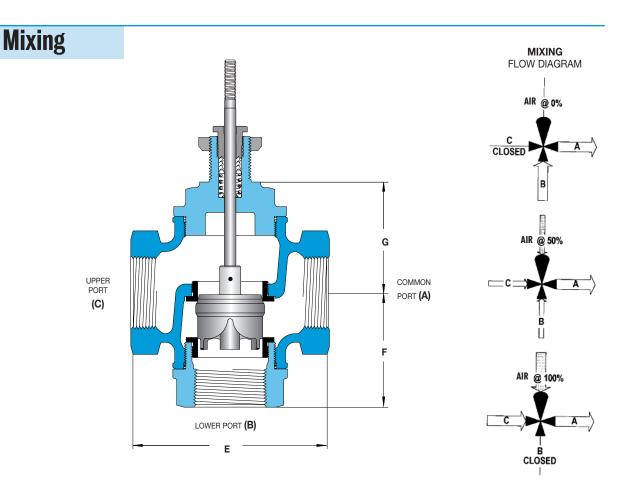

Trerice 3-Way Valves are not designed for use in steam applications. To properly control the mixing of two flows, inlet pressures at ports B and C should be as equal as possible.

## **Specifications**

Body Material	Trim Material	Trim Style	Close-off	Connection	Pressure & Temperature Rating
Stainless steel	Stainless steel	Linear	Class IV	Threaded	515 PSI @ 400°F (204°C)

## **Valve Selection**

Mixing				Maximum Clos	e-Off Pressure (psid)				
Valve Body	alve Body Size			Actuator		Dimensions			Approximate
Number	Connection (NPT)	Nominal Port	Cv	940B	940B w/Positioner	E	F	G	Shipping Wt.
M18	1/2	1/2"	6.3	210	335	5.0 [127]	2.8 [71]	2.8 [71]	8 lbs [3.6 kg]
M25	3/4	3/4"	8.2	81	335	5.0 [127]	2.8 [71]	2.8 [71]	8 lbs [3.6 kg]
M34	1	1"	10	33	335	5.0 [127]	2.8 [71]	2.8 [71]	8 lbs [3.6 kg]
M56	1 <sup>1</sup> /2	<b>1</b> <sup>1</sup> /2"	20	Х	286	6.1 [155]	3.4 [86]	3.5 [89]	15 lbs [6.8 kg]
M67	2	2"	40	Х	170	6.5 [165]	3.8 [97]	3.8 [97]	19 lbs [8.6 kg]

