57

# 

### **Adjust Angle Digital Thermometer**

## LIGHT-POWERED ADJUSTABLE ANGLE DIGITAL THERMOMETER

The Weksler<sup>™</sup> light-powered industrial thermometer offers an environmentally friendly alternative to mercury-filled industrial thermometers. The light-powered industrial thermometer can help reduce inventory requirements with its switchable °F and °C feature, which offers a wide variety of ranges in a single unit (-40/300°F and -40°/150°C). The high impact ABS case can be adjusted for viewing from any angle. Stem lengths of 3½<sup>″</sup> and 6<sup>″</sup> are available and are interchangeable with standard glass column industrial thermometers. The light-powered industrial thermometer features a ½<sup>″</sup> LCD digital display.

#### SPECIFICATIONS


Switchable Range: -40/300°F - 40/150°C Accuracy: 1% of reading or 1° whichever is greater Display: ½" LCD digits Resolution: ½10° between -19.9/199.9°F or 28/93°C Update Rate: 10 seconds Recalibration: Internal potentiometer Sensor: Glass passivator thermistor

#### ACCESSORIES

Thermowells For Adjustable Angle Thermometers: See page 5

#### PHYSICAL CHARACTERISTICS

Case: High-impact ABS Stem Assemblies, Industrial Glass: Full conformance with Fed. Spec. GGT-321D Stem Lengths: 3½″ and 6″ Standard Connection: 1¼″-18 NEF Swivel Nut Weight: 10 oz.

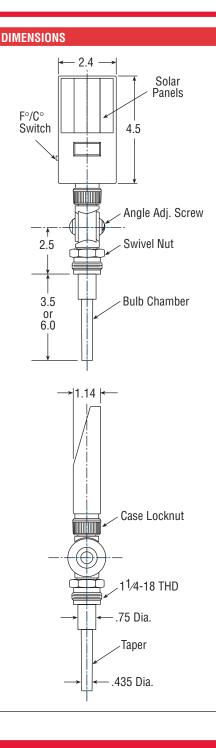



#### **HOW TO ORDER**

	AD	35	Ą	FC
<ol> <li>Product Type: AD = Adjust Angle Digital Thermometer_</li> </ol>				
<b>2.</b> Stem Length: 35 = 3 <sup>1</sup> / <sub>2</sub> "; 60 = 6"				
4. Connection Location: A = Adjust Angle				
5. Range: FC = Switchable Range -40/300°F	or -40/150	°C 0°		